


NPK®

Sorting grab

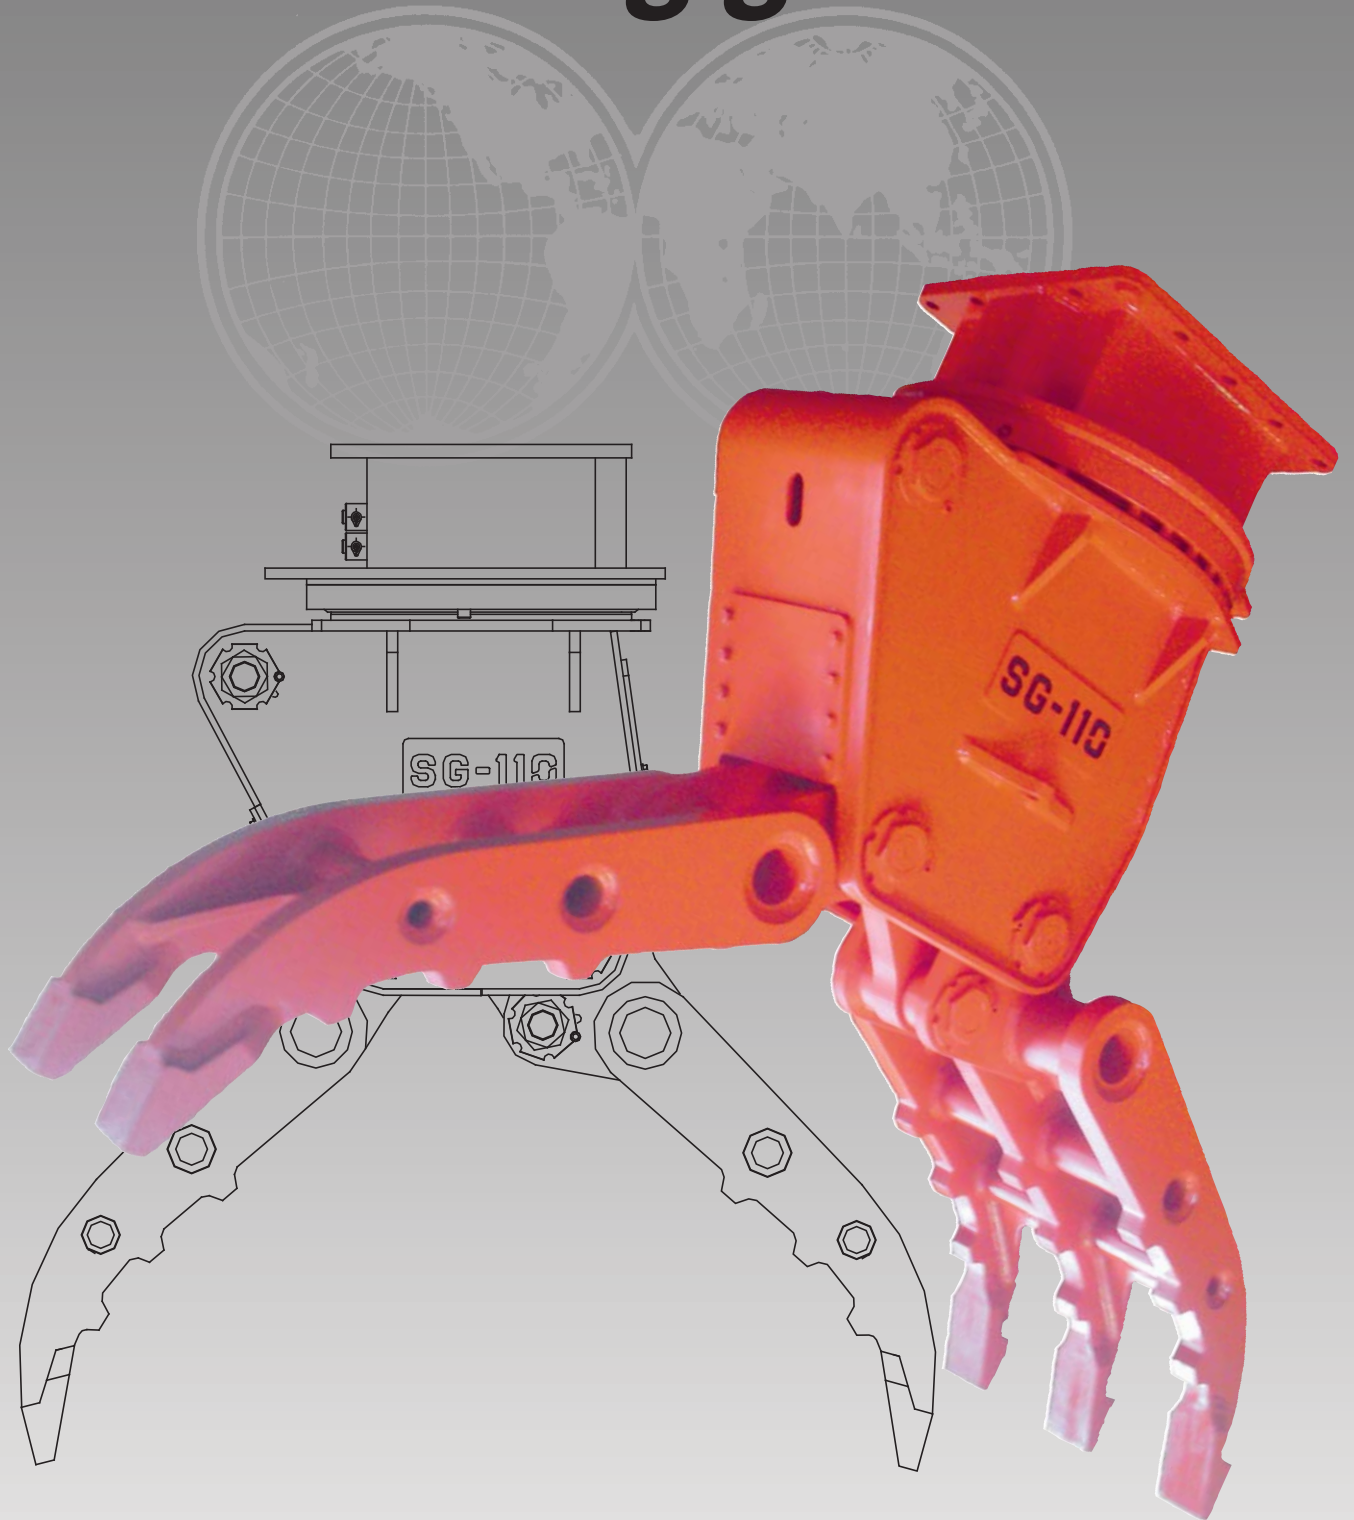

NPK®

www.npke.eu

a division of Nippon Pneumatic Mfg. Co. Ltd. Osaka Japan



Grabbing utility

The new sorting grab SG-110 is a versatile attachment, developed for sorting, loading, replacing and deconstruction of light (f.e. wooden) structures. Due to its loading capacity and high closing force, the SG-110 is also the ideal solution for placement of heavy rocks and stones. The slim design and 360° hydraulic rotation offers great manoeuvrability resulting in a multipurpose and cost-efficient machine.

Advantages

- Heavy duty (high tension steel) construction, arms and frame made of Hardox 400.
- Smooth open/close operation due to cushioned end stroke of cylinder.
- Option: exchangeable teeth.
- Direct connection to carrier – drainline not required.
- Fully protected hydraulic components.



TECHNICAL SPECIFICATIONS

Model	SG-110
Excavator weight (ton)	12 - 20
Operating weight (kg)	1150
Max. jaw opening (mm)	2120
Width (mm)	680
Opening / Closing	
Max. working pressure (MPa)	35
Max. oil flow (MPa)	100
Rotation	
Max. working pressure (MPa)	13
Max. oil flow (MPa)	25
Closing force (kN)	50

Technical specifications subject to change without prior notice



NPK Europe (Holland) BV

P. O. Box 30157
3001 DD Rotterdam
The Netherlands
Tel: +31 10 205 1710
Fax: +31 10 205 1715
E-mail: info@npke.nl

Dealer: